


STAKING (TYP), ON 2:1 SLOPES OR STEEPER,
AND DRIVEN FLUSH WITH SOD SURFACE

MATCH TO EXISTING
SURFACE GRADE LEVEL
SEE NOTE 2

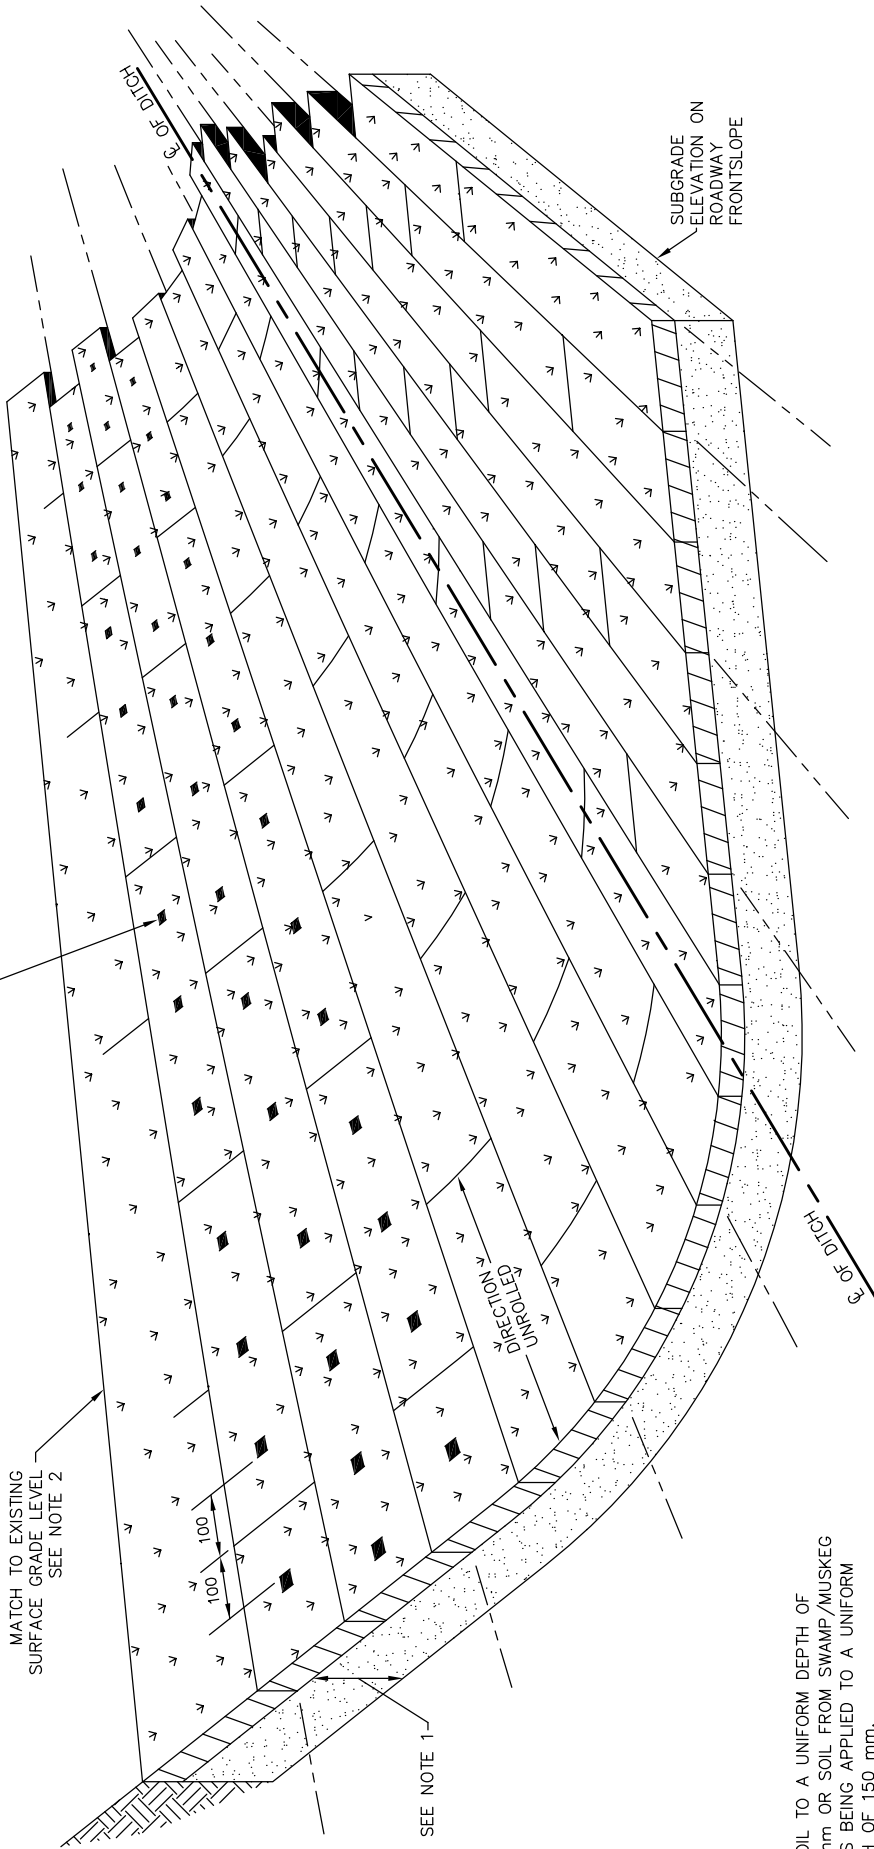

NOTES:

1. TOPSOIL TO A UNIFORM DEPTH OF 100 mm OR SOIL FROM SWAMP/MUSKEG AREAS BEING APPLIED TO A UNIFORM DEPTH OF 150 mm.
2. SODDING TO BE COUNTERSUNK TO EXISTING SURFACE GRADE LEVEL AT ALL MATCH-IN POINTS.
3. STAKES FOR PEGGING SHALL BE 19 mm x 19 mm x 300 mm IN LENGTH.
4. APPLY SOD TO DESIGNATED AREAS.
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN.

DISCLAIMER OF WARRANTY
The data is provided "as-is", without warranty of any kind either expressed or implied. Any and all liabilities for damage, direct or indirect, however caused, and resulting in any way by use of the supplied data is the full and final responsibility of the user.

COPYRIGHT
All rights are reserved. No part of the supplied data may be reproduced, or transmitted to others, in any form or by any means, without the written permission of the
CITY OF GREATER SUDBURY.



SODDING OF SIDE SLOPES

DRAWN BY: STS/RFRANK REV No:

DATE: 2003-03-03 REV DATE:

SCALE: NTS CAD/FILE No.:

A2019-1 (1 OF 1)

APP'D:

GSSD-218.010