


TANGENT

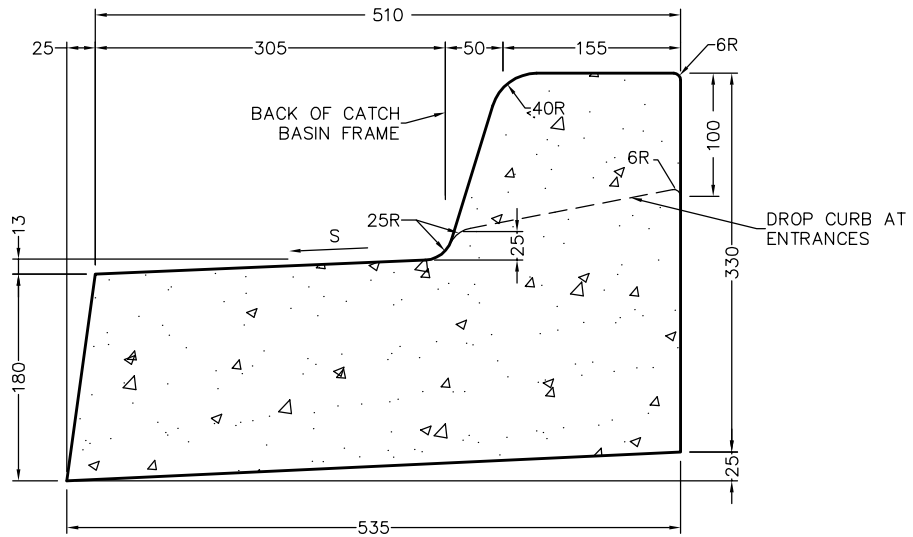

SUPERELEVATED

NOTES:

1. TOP EDGE OF BACK OF CURB & GUTTER TO BE ROUNDED WITH A 6 mm ROUNDING TOOL.
2. CLASS OF CONCRETE 32 MPa AT 28 DAYS.
3. TOP OF EXPANSION JOINTS TO BE 6 mm LOWER THAN FINISHED CONCRETE SURFACE.
4. TREATMENT AT ENTRANCES SHALL CONFORM WITH GSSD-351.010.
5. THE LENGTH OF TRANSITION FROM ONE CURB TYPE TO ANOTHER SHALL BE 3.0 m.
6. VOLUME OF CONCRETE FOR:
 - FULL TANGENT CURB: 0.115 m³ PER LINEAR METER.
 - FULL DROPPED TANGENT CURB: 0.093 m³ PER LINEAR METER.
 - FULL SUPERELEVATED CURB: 0.118 m³ PER LINEAR METER.
 - FULL DROPPED SUPERELEVATED CURB: 0.098 m³ PER LINEAR METER.
7. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN.

LEGEND

S - RATE OF SUPERELEVATION IN %



CONCRETE BARRIER CURB
WITH STANDARD GUTTER

DRAWN BY: STS/RFRANK	REV No: 1
DATE: 2003-03-03	REV DATE: JAN/2013
SCALE: NTS	CAD/FILE No.: A1926-1 (1 OF 1)
APP'D:	GSSD-600.010

DISCLAIMER OF WARRANTY : The data is provided "as-is", without warranty of any kind either expressed or implied. Any and all liabilities for damage, direct or indirect, however caused, and resulting in any way by use of the supplied data is the full and final responsibility of the user.

COPYRIGHT : All rights are reserved. No part of the supplied data may be reproduced, or transmitted to others, in any form or by any means, without the prior written permission of the CITY OF GREATER SUDBURY.